


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 26 TOWNSHIP 17 RANGE 2
DATE: 6-14-2000
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Stone w/rebar
METHOD OF ESTABLISHMENT: County: 9-19-95

IN. S.P.C. E ZONE, NAD 83
NAME: 17022604
N: 515327.5028(m)
E: 47646.9109(m)

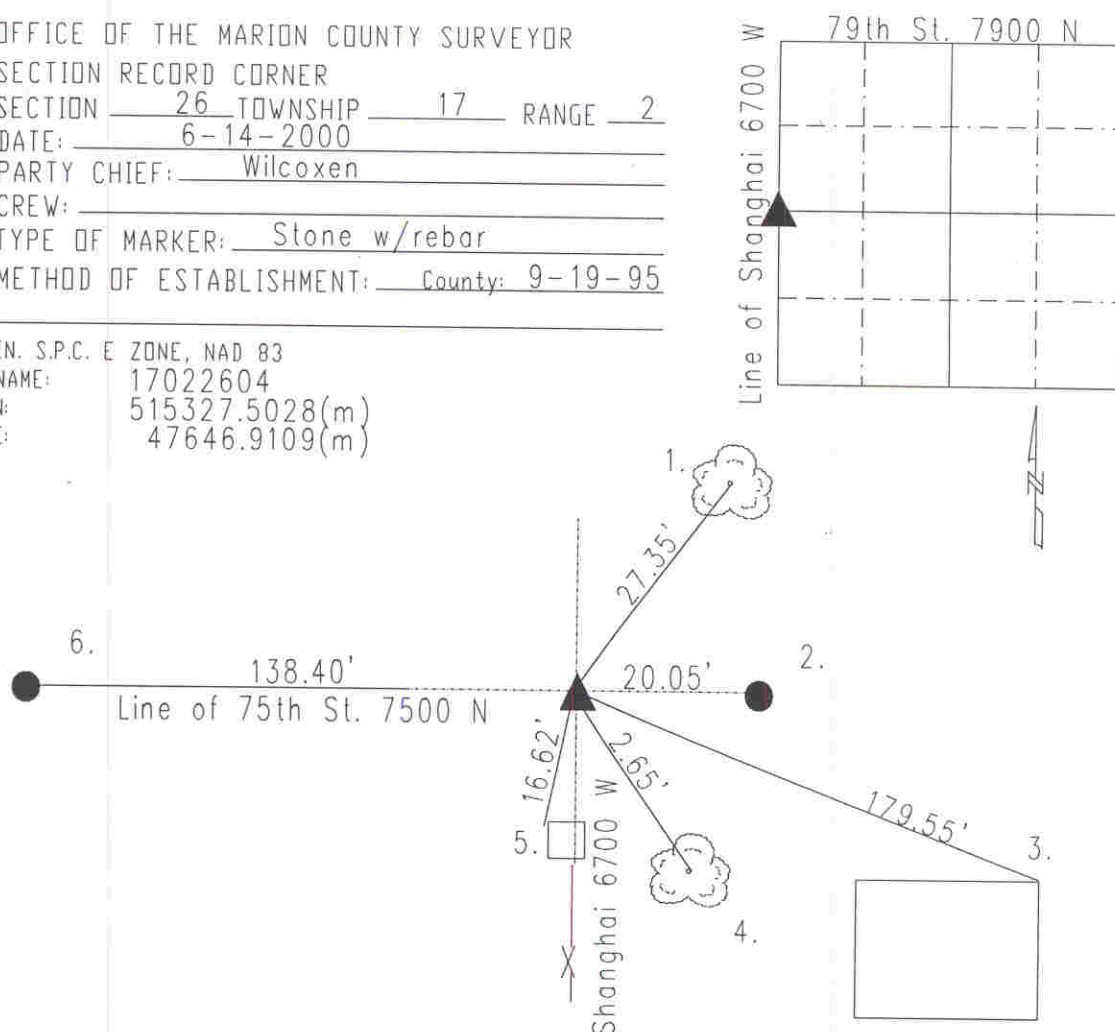

Original post set by Laughlin in 1821 with witnesses: 15" beech N 28 W 10 links, 12" beech S 31 E 25 links per Marion County Atlas pg. 4. Stone set by Hosbrook 10-15-1852 with a 28" oak S 12.5 E 122 links per Pike Township Legal Survey Book pg. 22. Stone called by Smith 4-25-1899 with stone 20 5/10' E per Pike Township Legal Survey Book pg. 22. Stone w/ rebar guard stake found per Kiste MCSO 9-95. Stone agreed within 0.4' of recorded distance on Lakeside Sec. 2 plat per Plat Book 24, pg. 87 to the SW corner 26-17-2. (2634.00' record vs 2633.60' measured). Stone fell on an existing fence line to the S and on a fence line to the E called out in Weihe Engineering #93-1493 not found in '95. Stone fell 0.7' N of line projected from 'c' 26-17-2 through a railroad spike found at SW SEQ NWQ 26-17-2. Stone found 20.05' E of corner stone 1899 witness. W stone accepted as original per MCS 9-20-95. Stone falls 1.3 S and 1.6 W of section corner for Normandy Farms Sec. 10 #89-014307. Plat location agrees w/mid pt. betwn SW & NW 26-17-2.

SC722604

REF.	DISTANCE	DESCRIPTION
1.	27.35'	Mag nail w/brass washer S Triple cottonwood 12"up
2.	20.05'	Due E to witness stone
3.	179.55'	NE corner of post for tennis court
4.	2.65'	Mag nail w/brass washer NE 3" thorn tree 12"up
5.	16.62'	PK nail NW corne rof wooden fence post
6.	138.40'	Due W to property corner (tack in concrete 3" pvc pipe)